Technical sheet

H2000 Standing Flower Tower

Specification

(mm)

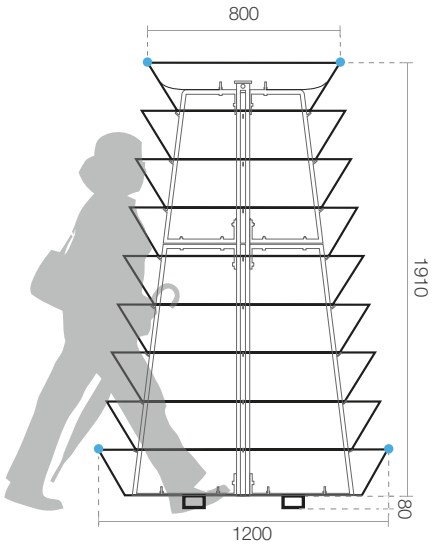

A side view

Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent

P 379058

Registered design

Wp 9324-25

Made in EU

24 month warranty

Number of rings	9	Weight before planting	124 kg
Capacity	1168 l	Weight after planting	600 - 1150 kg [2]
Total height	1990 mm	Estimated amount of seedlings	110 - 130 pieces
Base diameter	1200 mm	Warranty	24 months

[2] Weight depending on the type of soil and its moisture

Terra Cascading Flower Towers include a 3-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

Colours

DUPLEX System (1-4) The combination of a galvanized layer and a polyester powder coat gives an extraordinary resistance. The top coat of paint, which supposed to be a decoration, becomes an additional anticorrosive layer.

Stainless steel (5)

Production method

- laser-cut rings
- MAG / TIG welded rings
- hot dip galvanized
- the exterior surface of the rings is powder coated (DUPLEX system)

Safety

- rubber gasket on each ring
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground

Copyright © 2016 Terra. All rights reserved.

Terra Group

tel: +48 68 455 62 69 | info@terra-uk.eu

www.terra-uk.eu

Technical sheet

H2000 Standing Flower Tower

Transport (mm)

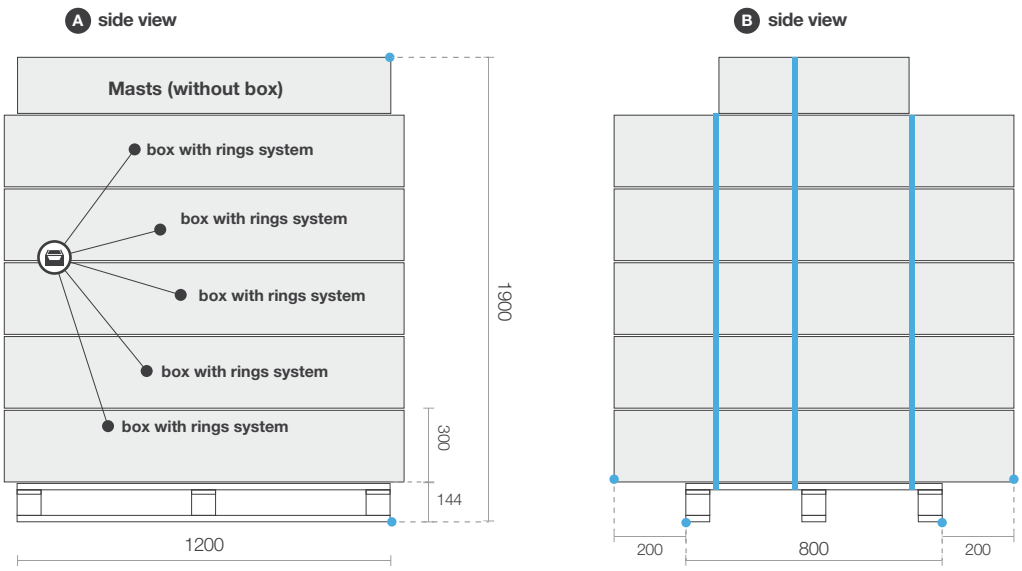

SET PACKED IN A BOX

UP TO 5 SETS FOR A EURO PALLET

Set content

Lower pan with legs	1 item	Mast (profile 50x50 mm)	1 item
Rings	8 items	Mast (profile 60x60 mm)	1 item
Screw 10x50	18 items	Upper span	4 items
Screw 10x90	8 items	Lower span	4 items
Gasket	30 m	Protective flat bar	2 items
Glue for the gasket	3 items		

Additional accessories

anti-theft system

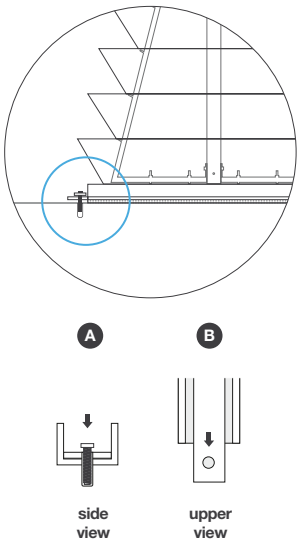

watering system

TerraClick Tif



number of lines in the system:	5
type of connector:	GEKA
flow of drippers:	2 – 3 l/h
pressure:	0,5 - 4 atm
opening pressure of the anti-drip:	0,4 atm
closing pressure of the anti-drip:	0,2 atm
hose type:	**new generation** resistant to chemicals and acidification

Copyright © 2016 Terra. All rights reserved.

Terra® Group

tel: +48 68 455 62 69 | info@terra-uk.eu

www.terra-uk.eu