




H700

Standing Flower Tower

Specification

(mm)

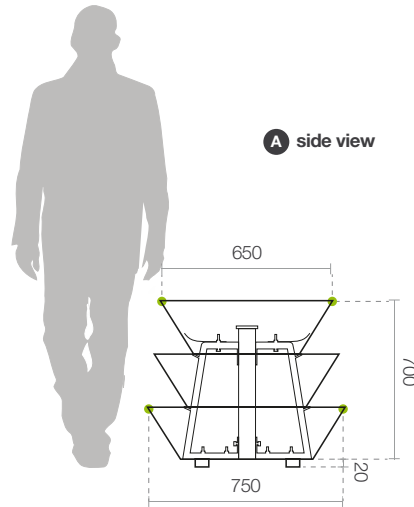

! Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent

▼ P 379058

Registered design

▼ Wp 9324-25

Made in EU

36 month warranty

Number of rings	3	Weight before planting	35 kg
Capacity	167 l	Weight after planting	105 - 160 kg
Total height	720 mm	Estimated amount of seedlings	30 - 40 pieces
Base diameter	750 mm	Warranty	36 months

Weight depending on the type of soil and its moisture

Terra Cascading Flower Towers include a 3-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

Colours (DUPLEX)



DUPLEX System

The combination of a galvanized layer and a polyester powder coat gives an extraordinary resistance. The top coat of paint, which supposed to be a decoration, becomes an additional anticorrosive layer.

Production method

- laser-cut rings
- MAG / TIG welded rings
- hot dip galvanized
- powder coated rings (DUPLEX system)

Safety


- rubber gasket on each ring
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground



H700

Standing Flower Tower

Transport (mm)

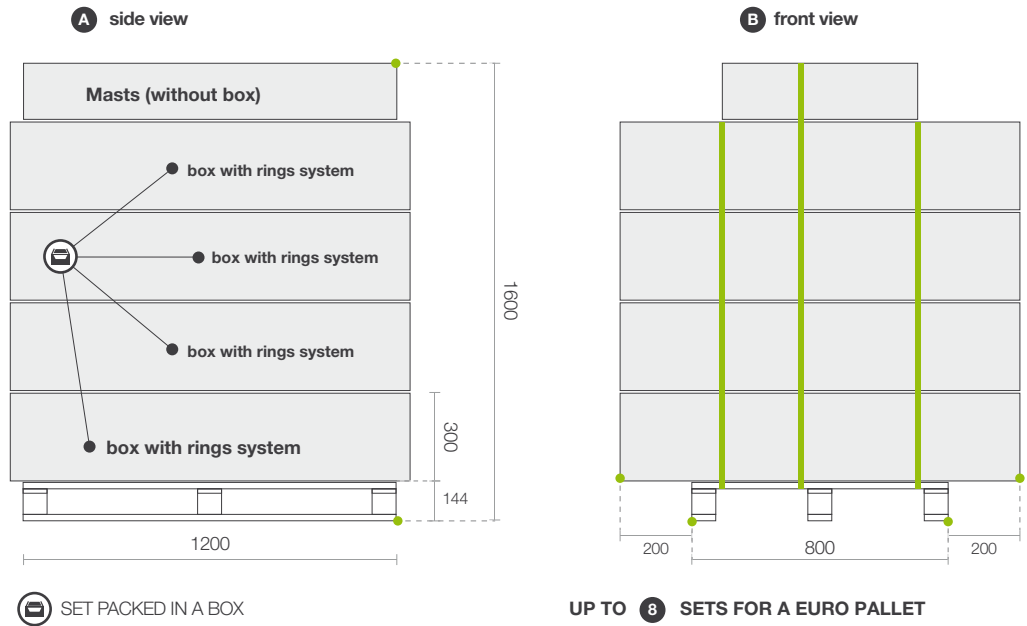


Set content

Lower pan	1 item	Mast	1 items
Rings	2 items	Span	4 items
Legs	2 items	Security flat bar	2 items
Screw 10x50	10 items	Gasket	9 m
Screw 10x90	4 items	Glue for the gasket	1 item
Conical screw 8x50	4 items		

Additional accessories

 anti-theft system




A




side view

B



upper view


 mobile system



Optional fixing



 transport module



A



front view


B



side view

 watering system

TerraClick Tif



number of lines in the system: 2
 type of connector: GEKA
 flow of drippers: 2 - 3 l/h
 pressure: 0,5 - 4 atm
 opening pressure of the anti-drip: 0,4 atm
 closing pressure of the anti-drip: 0,2 atm
 hose type: **new generation**
 resistant to chemicals and acidification

